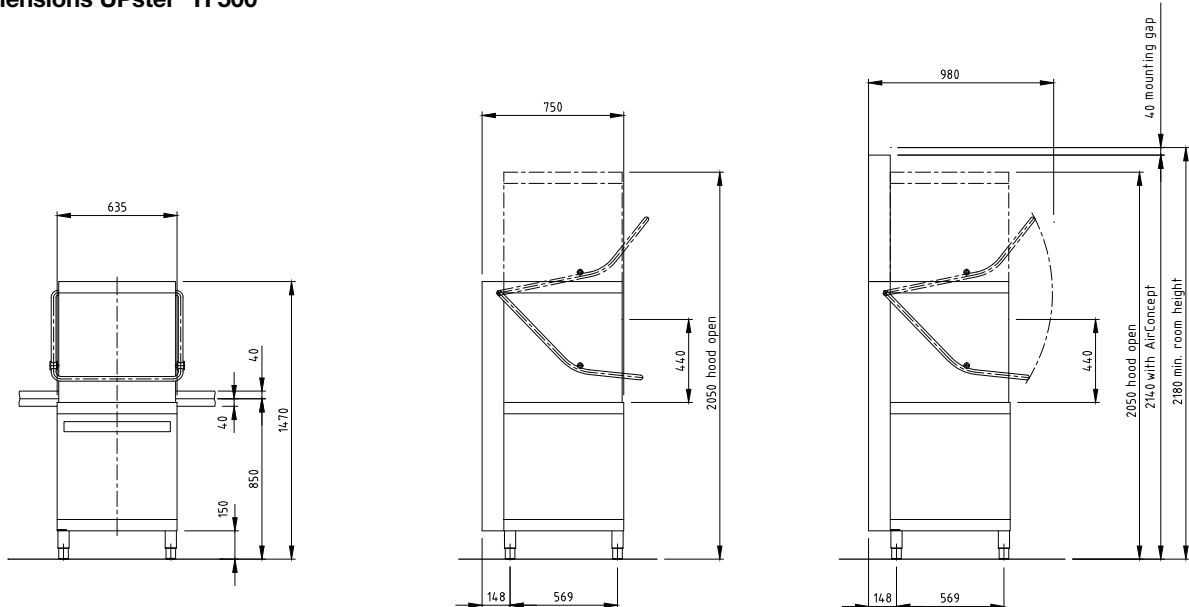


**Dimensions UPster® H 500**

- Drain connection hose DN 22
- Fresh water feed pipe G ¾"
- Soft water 10 °C – max. 0.54 mmol/l CaCO<sub>3</sub> (max. 3 °dH)

- Minimum flow pressure: 60 kPa / 0.6 bar – maximum: 500 kPa / 5 bar
- Connecting hose(s) extending approx. 1.8 m from the machine
- Connecting hose can be positioned to the left or right

Technical data:	H 500	Key selling points:
Tank heating in kW:	2.0	<ul style="list-style-type: none"><li>• <b>Passing height 440 mm</b></li><li>• <b>Proven standards of hygiene thanks to digital display</b> of wash and final rinse temperatures</li><li>• <b>Wash water filter system <i>AktivPlus</i></b> for brilliant rinsing results thanks to double-filtered fresh water</li><li>• <b>Exceptionally user-friendly</b> – smart electronic control system with clearly designed icons</li><li>• Intuitive user interface – <b>blue operating concept</b></li><li>• <b>Wash and rinse system</b> at top and bottom, <b>stainless steel wash and rinse arms</b></li><li>• <b>Stainless steel detergent and rinse aid pipes inside machine</b></li><li>• <b>Pressure booster pump and drain pump</b></li><li>• <b>Leakage detection system</b> in the base drip tray</li><li>• <b>Self-cleaning programme</b></li><li>• <b>Stainless steel tank cover sieve</b></li><li>• <b>Wash pump</b> with glass protecting <b>soft start</b></li><li>• <b>Double walled construction with additional hood insulation</b> – reduces heat and noise emissions</li><li>• <b>Flexible use with no additional effort</b> – plinth set-up and height adjustment possible for all machines</li><li>• <b>Automatic programme start</b> – simply press down the hood handle to start the programme</li><li>• <b>Complete connection kit</b> for water, waste water and electricity</li><li>• <b>Easy service access</b></li></ul>
Boiler heating in kW:		
Fuse 20 A	7.5	
Fuse 25 A	9.0	
Pump output in kW:	0.75	
Total connected load in kW:		
Fuse 20 A	10.7	
Fuse 25 A	12.2	
Water consumption in l/rack:	2.6	
Tank capacity in l:	22.0	
Passing height in mm:	440	
Rack size in mm:	500 x 500	
Cycle time in seconds:	90/150/210	
<b>Theoretical capacity racks/h:</b>	<b>40/24/17</b>	
<b>Theoretical capacity plates/h:</b>	<b>720/432/306</b>	
<b>Theoretical capacity glasses/h:</b>	<b>1,440/864/612</b>	
If the machine is connected to a cold water supply and/or if racks are inserted in quick succession, the duration of the wash cycles may be increased to achieve hygienic final rinse temperatures.		