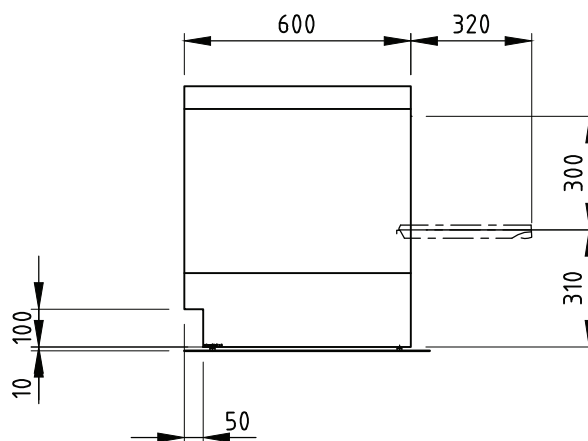
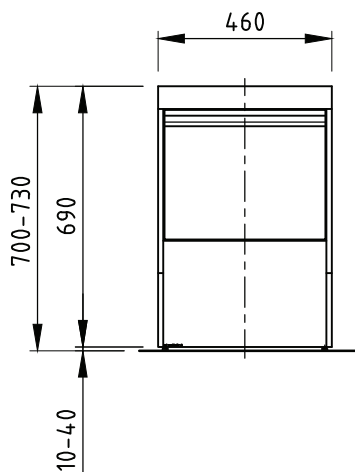


**Dimensions UPster® U 400**

- Drain connection hose DN 22
- Fresh water feed pipe G 3/4"
- Soft water 10 °C – max. 0.54 mmol/l CaCO<sub>3</sub> (max. 3 °dH)

- Minimum flow pressure: 250 kPa / 2.5 bar – maximum: 500 kPa / 5 bar
- Connecting hose(s) extending approx. 1.6 m from the machine
- Connecting hose can be positioned to the left or right

Technical data:	U 400		Key selling points:
	230 V	400 V	
Tank heating in kW:	2.0		<ul style="list-style-type: none"><li>• <b>Entry height 300 mm</b></li><li>• <b>Proven standards of hygiene thanks to digital display</b> of wash and final rinse temperatures</li><li>• <b>Eco-filter system provides brilliant washing results</b> thanks to superb wash water filtering</li><li>• <b>Exceptionally user-friendly</b> – smart electronic control system with clearly designed icons</li><li>• <b>Wash and rinse system</b> at top and bottom</li><li>• <b>Self-cleaning programme</b></li><li>• <b>Wash pump</b> with glass protecting <b>soft start</b></li><li>• <b>Double walled construction with additional door insulation</b> – reduces heat and noise emissions</li><li>• <b>Deep-drawn wash chamber</b> with integrated rack guides</li><li>• <b>Rear cladding made of stainless steel</b></li><li>• <b>Complete connection kit</b> for water, waste water and electricity</li><li>• <b>400 V or 230 V</b> – can be converted on site</li><li>• <b>Easy service access</b></li></ul>
Boiler heating in kW: Fuse 16 A	2.0	3.0	
Pump output in kW:	0.55		
Total connected load in kW: Fuse 16 A	2.8	3.8	
Water consumption in l/rack:	2.2		
Tank capacity in l:	11.0		
Entry height in mm:	300		
Rack size in mm:	400 x 400		
Cycle time in seconds:	120/180/240		
<b>Theoretical capacity racks/h:</b>	<b>30/20/15</b>		
<b>Theoretical capacity glasses/h:</b>	<b>750/500/375</b>		
If the machine is connected to a cold water supply and/or if racks are inserted in quick succession, the duration of the wash cycles may be increased to achieve hygienic final rinse temperatures.			